Installation Guide

Case component

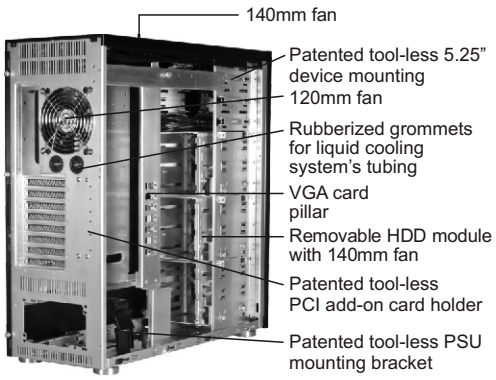
140mm fan
Patented tool-less 5.25" device mounting
120mm fan
Rubberized grommets for liquid cooling system's tubing
VGA card pillar
Removable HDD module with 140mm fan
Patented tool-less PCI add-on card holder
Patented tool-less PSU mounting bracket

Guide to open left and right side panels

Remove six thumb screws.



Slide panel backward of the case.

Hardware list

* Extra quantities are spare parts.

Screw (18) to fix drive & motherboard	Buzzer(1)	Thumb screw(24) for HDD	Shorter vision thumb screw(9) for mother board mount
Bracket(1) for power supply mounting	Thumb screw(1)	Rubber ring(24) for HDD	Longer vision thumb screw(3) for mother board mount
Mounting bracket (1) for SSI CEB/EEB M/B	Nut(3) for work with stand-off	Screw (5) for PSU mounting	Clamp(1) for cable management
Box(1) for spare parts	Cable tie (3) for cable	Hex wrench for M/B(1) stand-off	Thumb screw(7) for PCI card holder
Copper bolt(3) for motherboard	Clamp(1) to secure wire	PCI card holder-S(2) PCI card holder-L(5)	USB3.0 to USB2.0 convertor (1)
PCI bracket (1)			

Remove front panel

Pull the front panel toward yourself.

Remove the mounting bezel



Press the right and left side of the bezel to remove.

Motherboard installation

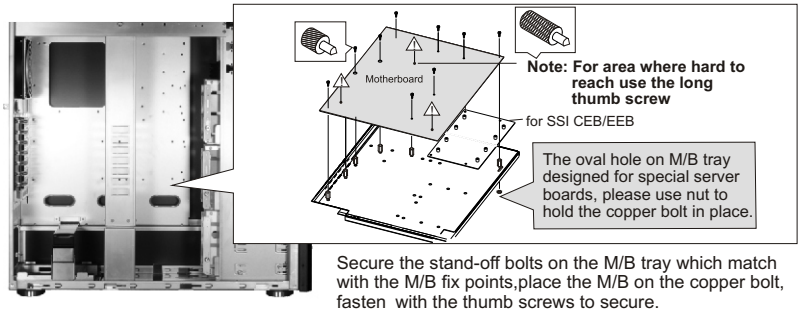
Motherboard
Note: For area where hard to reach use the long thumb screw
for SSI CEB/EEB
The oval hole on M/B tray designed for special server boards, please use nut to hold the copper bolt in place.

Secure the stand-off bolts on the M/B tray which match with the M/B fix points,place the M/B on the copper bolt, fasten with the thumb screws to secure.

ODD installation





1. Pull the front panel to remove it.
2. Release the 5.25" bezel
3. Press plastic handle to release the mounting bracket.

Push the ODD into the 5.25" rack, close the bracket to secure the ODD

Front panel cable installation guide

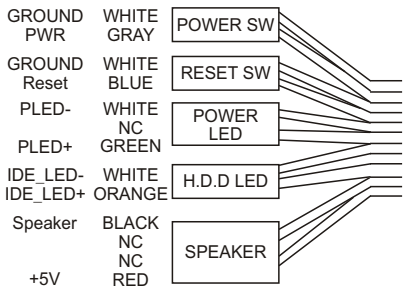

Hard disk installation for the front HDD cage

Install the screws to the HDD with anti-vibration rubber rings.

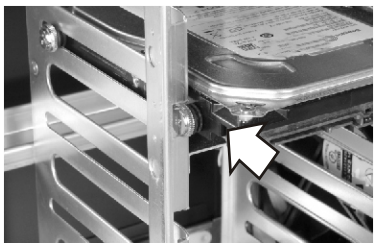

Slide the HDD into the front HDD cage

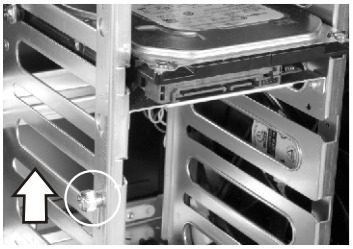

Close the gate to secure the HDD.

PCI Add-on card installation



Open the aluminum latch to remove the PCI slot bracket.



Push the card into the PCI slot, close the aluminum latch to secure the card.



Finish.

PCI bracket installation



For access to rear I/O port.

VGA Card Pillar Installation Guide

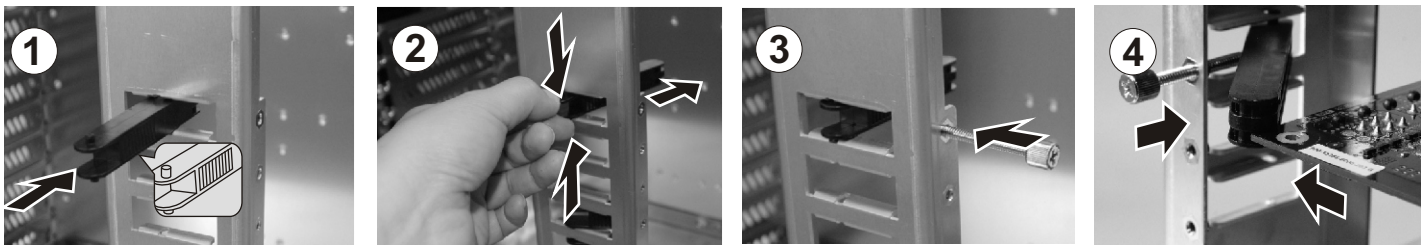

PSU installation

Place the PSU on the stand, and push again the rear panel.



Place the PSU bracket into according slot as shown.

Lock the PSU bracket to secure the PSU.

Cable management note



Use cable clamp to tidy up the cables.



* Remove clamp, use tweezers to release the cable clamp

I/O port installation

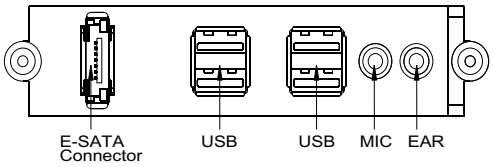

HD AUDIO



USB3.0



SATA



USB3.0 to USB2.0 convertor